

钻头


友启工具
Youqitools



钻头

整体硬质合金-通用型

碳钢	合金钢	工具钢	不锈钢	钛合金	耐热合金	铸铁	球墨铸铁	铝合金	铜合金
◎	◎	◎	◎	○	○	◎	◎		○

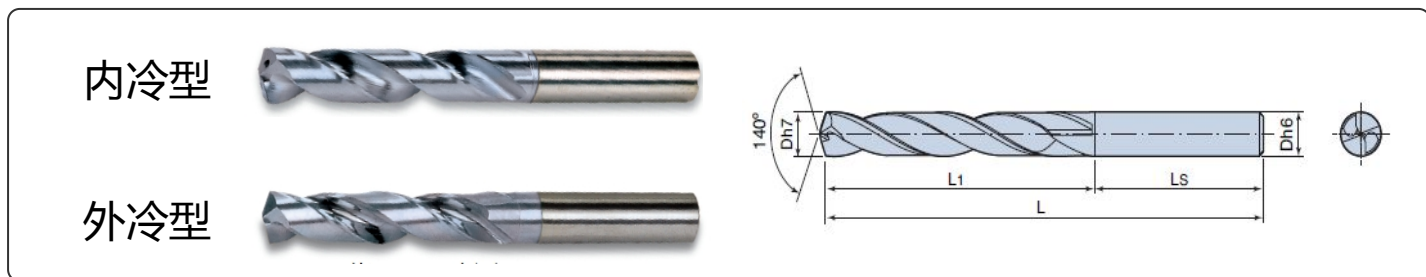

直径范围：Ø1.5~Ø25，每间隔0.1mm—规格，尺寸范围以外接受非标定做，价格比列与标准品一致。

订货型号	规格参数													
	刃部直径	柄部直径	3D				5D				8D			
			尺寸		冷却方式		尺寸		内	外	尺寸		内	外
3,5,8	ØD	Ød	L	L1	I	O	L	L1	I	O	L	L1	I	O
U510D-PMK-015~020-□□	1.5~2.0	3	63	10	●	●	70	14	●	●	76	19	●	○
U510D-PMK-021~025-□□	2.1~2.5		68	15	●	●	68	24	●	●	81	28	●	○
U510D-PMK-026~030-□□	2.6~3.0		18	●	●	28		●	●	33		●	○	
U510D-PMK-031~035-□□	3.1~3.5	4	72	20	●	●	86	32	●	●	92	39	●	○
U510D-PMK-036~040-□□	3.6~4.0			23	●	●		36	●	●		44	●	○
U510D-PMK-041~045-□□	4.1~4.5	5	80	25	●	●	98	40	●	●	105	50	●	○
U510D-PMK-046~050-□□	4.6~5.0			28	●	●		44	●	●		55	●	○
U510D-PMK-051~055-□□	5.1~5.5	6	82	28	●	●	100	45	●	●	118	61	●	○
U510D-PMK-056~060-□□	5.5~6.0			30	●	●		48	●	●		66	●	○
U510D-PMK-061~065-□□	6.1~6.5	7	88	33	●	●	109	52	●	●	130	72	●	○
U510D-PMK-066~070-□□	6.6~7.0			35	●	●		56	●	●		77	●	○
U510D-PMK-071~075-□□	7.1~7.5	8	94	38	●	●	118	60	●	●	142	83	●	○
U510D-PMK-076~080-□□	7.6~8.0			40	●	●		64	●	●		88	●	○
U510D-PMK-081~085-□□	8.1~8.5	9	100	43	●	●	127	68	●	●	154	94	●	○
U510D-PMK-086~090-□□	8.6~9.0			45	●	●		72	●	●		99	●	○
U510D-PMK-091~095-□□	9.1~9.5	10	106	48	●	●	136	76	●	●	166	105	●	○
U510D-PMK-095~100-□□	9.6~10.0			50	●	●		80	●	●		110	●	○
U510D-PMK-101~105-□□	10.1~10.5	11	116	53	●	●	149	84	●	●	182	116	●	○
U510D-PMK-106~110-□□	10.6~11.0			55	●	●		88	●	●		121	●	○
U510D-PMK-111~115-□□	11.1~11.5	12	122	58	●	●	158	92	●	●	194	127	●	○
U510D-PMK-116~120-□□	11.6~12.0			60	●	●		96	●	●		132	●	○
U510D-PMK-121~125-□□	12.1~12.5	13	128	63	●	●	167	100	●	●	206	138	●	○

U510D-PMK-126~130-□□	12.6~13.0	13	120	65	●	●	107	104	●	●	200	143	●	○
U510D-PMK-131~135-□□	13.1~13.5	14	134	68	●	●	176	108	●	●	218	149	●	○
U510D-PMK-136~140-□□	13.6~14.0			70	●	●		112	●	●		154	●	○


订货方法：例如订Ø11.9、5D、内冷的，格式U510D-PMK-119-5I。

2

钻头

整体硬质合金-通用型

碳钢	合金钢	工具钢	不锈钢	钛合金	耐热合金	铸铁	球墨铸铁	铝合金	铜合金
◎	◎	◎	◎	○	○	◎	◎		○

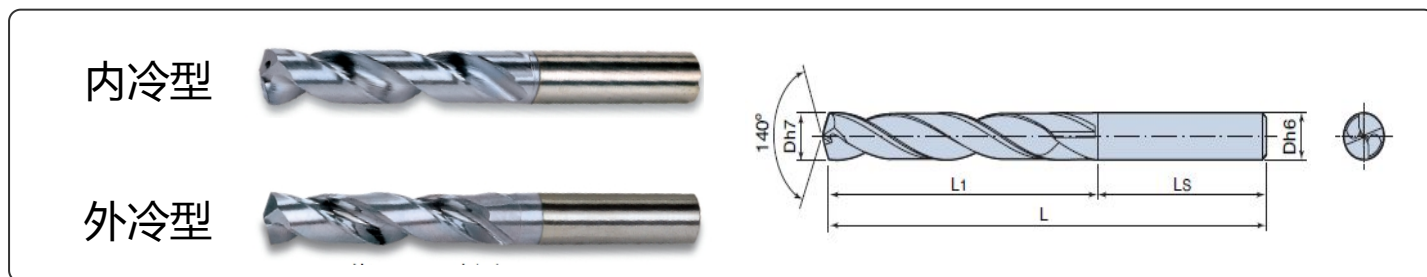

直径范围：Ø1.5~Ø25，每间隔0.1mm—规格，尺寸范围以外接受非标定做，价格比列与标准品一致。

订货型号	规格参数													
	刃部直径	柄部直径	3D				5D				8D			
			尺寸		冷却方式		尺寸		内	外	尺寸		内	外
3,5,8	ØD	Ød	L	L1	I	O	L	L1	I	O	L	L1	I	O
U510D-PMK-141~145-□□	14.1~14.5	15	140	73	●	●	185	116	●	●	230	160	●	○
U510D-PMK-146~150-□□	14.6~15.0			75	●	●		120	●	●		165	●	○
U510D-PMK-151~155-□□	15.1~15.5	16	146	78	●	●	194	124	●	●	242	171	●	○
U510D-PMK-156~160-□□	15.6~16.0			80	●	●		128	●	●		176	●	○
U510D-PMK-161~165-□□	16.1~16.5	17	152	83	●	●	203	132	●	●	254	182	●	○
U510D-PMK-166~170-□□	16.6~17.0			85	●	●		136	●	●		187	●	○
U510D-PMK-171~175-□□	17.1~17.5	18	158	88	●	●	214	140	●	●	266	193	●	○
U510D-PMK-176~180-□□	17.6~18.0			90	●	●		144	●	●		198	●	○
U510D-PMK-181~186-□□	18.1~18.5	19	164	93	●	●	221	148	●	●	278	204	●	○
U510D-PMK-186~190-□□	18.6~19.0			95	●	●		152	●	●		209	●	○
U510D-PMK-191~195-□□	19.1~19.5	20	170	98	●	●	230	156	●	●	290	215	●	○
U510D-PMK-196~200-□□	19.6~20.0			100	●	●		160	●	●		220	●	○
U510D-PMK-201~205-□□	20.1~20.5	21	176	103	●	●	239	164	●	●	无			
U510D-PMK-206~210-□□	20.6~21.0			105	●	●		168	●	●				
U510D-PMK-211~215-□□	21.1~21.5	22	182	108	●	●	248	172	●	●				
U510D-PMK-216~220-□□	21.6~22.0			110	●	●		176	●	●				
U510D-PMK-221~225-□□	22.1~22.5	23	188	113	●	●	257	180	●	●				
U510D-PMK-226~230-□□	22.6~23.0			115	●	●		184	●	●				
U510D-PMK-231~235-□□	23.1~23.5	24	194	118	●	●	266	188	●	●				
U510D-PMK-236~240-□□	23.6~24			120	●	●		192	●	●				

U510D-PMK-241~245-□□	24.1~24.5	25	200	123	●	●	275	196	●	●
U510D-PMK-246~250-□□	24.6~25.0			125	●	●		200	●	●


订货方法：例如订Ø11.9、5D、内冷的，格式U510D-PMK-119-5I。

3

钻头

整体硬质合金-**不锈钢专用**

碳钢	合金钢	工具钢	不锈钢	钛合金	耐热合金	铸铁	球墨铸铁	铝合金	铜合金
◎	◎	◎	◎	◎	◎				○

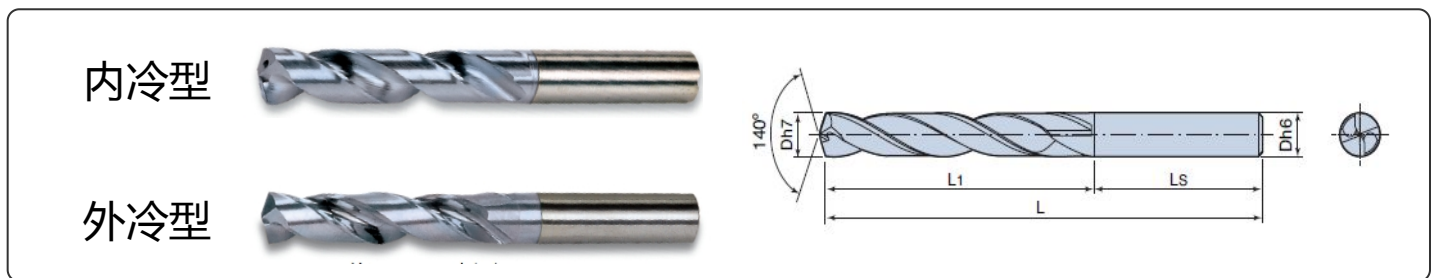

直径范围：Ø1.5~Ø25，每间隔0.1mm—规格，尺寸范围以外接受非标定做，价格比列与标准品一致。

订货型号	规格参数													
	刃部直径	柄部直径	3D				5D				8D			
			尺寸		冷却方式		尺寸		内	外	尺寸		内	外
3,5,8	ØD	Ød	L	L1	I	O	L	L1	I	O	L	L1	I	O
U512D-PMK-015~020-□□	1.5~2.0	3	63	10	●	●	70	14	●	●	76	19	●	○
U512D-PMK-021~025-□□	2.1~2.5		68	15	●	●	68	24	●	●	81	28	●	○
U512D-PMK-026~030-□□	2.6~3.0		68	18	●	●		28	●	●		33	●	○
U512D-PMK-031~035-□□	3.1~3.5	4	72	20	●	●	86	32	●	●	92	39	●	○
U512D-PMK-036~040-□□	3.6~4.0			23	●	●		36	●	●		44	●	○
U512D-PMK-041~045-□□	4.1~4.5	5	80	25	●	●	98	40	●	●	105	50	●	○
U512D-PMK-046~050-□□	4.6~5.0			28	●	●		44	●	●		55	●	○
U512D-PMK-051~055-□□	5.1~5.5	6	82	28	●	●	100	45	●	●	118	61	●	○
U512D-PMK-056~060-□□	5.5~6.0			30	●	●		48	●	●		66	●	○
U512D-PMK-061~065-□□	6.1~6.5	7	88	33	●	●	109	52	●	●	130	72	●	○
U512D-PMK-066~070-□□	6.6~7.0			35	●	●		56	●	●		77	●	○
U512D-PMK-071~075-□□	7.1~7.5	8	94	38	●	●	118	60	●	●	142	83	●	○
U512D-PMK-076~080-□□	7.6~8.0			40	●	●		64	●	●		88	●	○
U512D-PMK-081~085-□□	8.1~8.5	9	100	43	●	●	127	68	●	●	154	94	●	○
U512D-PMK-086~090-□□	8.6~9.0			45	●	●		72	●	●		99	●	○
U512D-PMK-091~095-□□	9.1~9.5	10	106	48	●	●	136	76	●	●	166	105	●	○

U512D-PMK-206~210-□□	20.6~21.0	21	170	105	●	●	248	168	●	●	无
U512D-PMK-211~215-□□	21.1~21.5	22	182	108	●	●	248	172	●	●	
U512D-PMK-216~220-□□	21.6~22.0			110	●	●		176	●	●	
U512D-PMK-221~225-□□	22.1~22.5	23	188	113	●	●	257	180	●	●	
U512D-PMK-226~230-□□	22.6~23.0			115	●	●		184	●	●	
U512D-PMK-231~235-□□	23.1~23.5	24	194	118	●	●	266	188	●	●	
U512D-PMK-236~240-□□	23.6~24			120	●	●		192	●	●	
U512D-PMK-241~245-□□	24.1~24.5	25	200	123	●	●	275	196	●	●	
U512D-PMK-246~250-□□	24.6~25.0			125	●	●		200	●	●	


订货方法：例如订Ø11.9、5D、内冷的，格式U512D-PMK-119-5I。

5

钻头

整体硬质合金-铸铁专用

碳钢	合金钢	工具钢	不锈钢	钛合金	耐热合金	铸铁	球墨铸铁	铝合金	铜合金
◎	◎	◎	◎	◎	◎				○

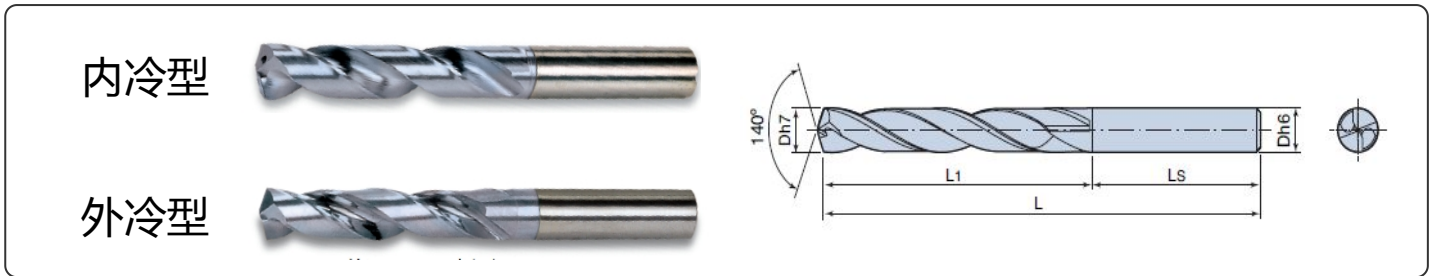

直径范围：Ø1.5~Ø25，每间隔0.1mm一规格，尺寸范围以外接受非标定做，价格比列与标准品一致。

订货型号	规格参数													
	刃部直径	柄部直径	3D				5D				8D			
			尺寸		冷却方式		尺寸		内	外	尺寸	内	外	
3,5,8	ØD	Ød	L	L1	I	O	L	L1	I	O	L	L1	I	O
U513D-PMK-015~020-□□	1.5~2.0	3	63	10	●	●	70	14	●	●	76	19	●	○
U513D-PMK-021~025-□□	2.1~2.5		68	15	●	●	68	24	●	●	81	28	●	○
U513D-PMK-026~030-□□	2.6~3.0		18	●	●	28		●	●	33		●	○	
U513D-PMK-031~035-□□	3.1~3.5	4	72	20	●	●	86	32	●	●	92	39	●	○
U513D-PMK-036~040-□□	3.6~4.0			23	●	●		36	●	●		44	●	○
U513D-PMK-041~045-□□	4.1~4.5	5	80	25	●	●	98	40	●	●	105	50	●	○
U513D-PMK-046~050-□□	4.6~5.0			28	●	●		44	●	●		55	●	○
U513D-PMK-051~055-□□	5.1~5.5	6	82	28	●	●	100	45	●	●	118	61	●	○
U513D-PMK-056~060-□□	5.5~6.0			30	●	●		48	●	●		66	●	○

U513D-PMK-061~065-□□	6.1~6.5	7	88	33	●	●	109	52	●	●	130	72	●	○
U513D-PMK-066~070-□□	6.6~7.0			35	●	●		56	●	●		77	●	○
U513D-PMK-071~075-□□	7.1~7.5	8	94	38	●	●	118	60	●	●	142	83	●	○
U513D-PMK-076~080-□□	7.6~8.0			40	●	●		64	●	●		88	●	○
U513D-PMK-081~085-□□	8.1~8.5	9	100	43	●	●	127	68	●	●	154	94	●	○
U513D-PMK-086~090-□□	8.6~9.0			45	●	●		72	●	●		99	●	○
U513D-PMK-091~095-□□	9.1~9.5	10	106	48	●	●	136	76	●	●	166	105	●	○
U513D-PMK-095~100-□□	9.6~10.0			50	●	●		80	●	●		110	●	○
U513D-PMK-101~105-□□	10.1~10.5	11	116	53	●	●	149	84	●	●	182	116	●	○
U513D-PMK-106~110-□□	10.6~11.0			55	●	●		88	●	●		121	●	○
U513D-PMK-111~115-□□	11.1~11.5	12	122	58	●	●	158	92	●	●	194	127	●	○
U513D-PMK-116~120-□□	11.6~12.0			60	●	●		96	●	●		132	●	○
U513D-PMK-121~125-□□	12.1~12.5	13	128	63	●	●	167	100	●	●	206	138	●	○
U513D-PMK-126~130-□□	12.6~13.0			65	●	●		104	●	●		143	●	○
U513D-PMK-131~135-□□	13.1~13.5	14	134	68	●	●	176	108	●	●	218	149	●	○
U513D-PMK-136~140-□□	13.6~14.0			70	●	●		112	●	●		154	●	○

订货方法：例如订Ø11.9、5D、内冷的，格式U513D-PMK-119-5I。

钻头


整体硬质合金-铸铁专用

碳钢	合金钢	工具钢	不锈钢	钛合金	耐热合金	铸铁	球墨铸铁	铝合金	铜合金
◎	◎	◎	◎	◎	◎				○

内冷型



外冷型

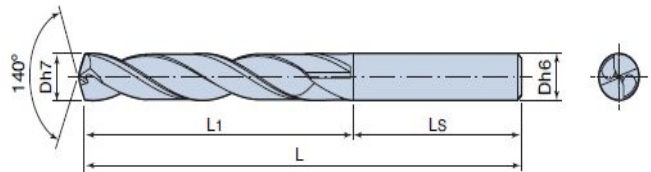

直径范围：Ø1.5~Ø25，每间隔0.1mm—规格，尺寸范围以外接受非标定做，价格比列与标准品一致。

订货型号	规格参数													
	刃部直径	柄部直径	3D				5D				8D			
			尺寸		冷却方式		尺寸		内	外	尺寸	内	外	
3,5,8	ØD	Ød	L	L1	I	O	L	L1	I	O	L	L1	I	O
U513D-PMK-141~145-□□	14.1~14.5	15	140	73	●	●	185	116	●	●	230	160	●	○
U513D-PMK-146~150-□□	14.6~15.0			75	●	●		120	●	●		165	●	○
U513D-PMK-151~155-□□	15.1~15.5	16	146	78	●	●	194	124	●	●	242	171	●	○
U513D-PMK-156~160-□□	15.6~16.0			80	●	●		128	●	●		176	●	○
U513D-PMK-161~165-□□	16.1~16.5	17	152	83	●	●	203	132	●	●	254	182	●	○
U513D-PMK-166~170-□□	16.6~17.0			85	●	●		136	●	●		187	●	○

		4															
		5															
		6	82	28	●	●	100	45	●	●	118	61	●	○			
				30	●	●		48	●	●		66	●	○			
		7	88	33	●	●	109	52	●	●	130	72	●	○			
				35	●	●		56	●	●		77	●	○			
		8	94	38	●	●	118	60	●	●	142	83	●	○			
				40	●	●		64	●	●		88	●	○			
		9	100	43	●	●	127	68	●	●	154	94	●	○			
				45	●	●		72	●	●		99	●	○			
		10	106	48	●	●	136	76	●	●	166	105	●	○			
				50	●	●		80	●	●		110	●	○			
		11	116	53	●	●	149	84	●	●	182	116	●	○			
				55	●	●		88	●	●		121	●	○			
		12	122	58	●	●	158	92	●	●	194	127	●	○			
				60	●	●		96	●	●		132	●	○			
		13	128	63	●	●	167	100	●	●	206	138	●	○			
				65	●	●		104	●	●		143	●	○			
		14	134	68	●	●	176	108	●	●	218	149	●	○			
				70	●	●		112	●	●		154	●	○			

订货方法：例如订Ø15.5、5D、内冷的，格式U514D-PMK-155-5L。

4

钻头


整体硬质合金-焊接型

碳钢	合金钢	工具钢	不锈钢	钛合金	耐热合金	铸铁	球墨铸铁	铝合金	铜合金
◎	◎	◎	◎	◎	◎				○

内冷型



外冷型

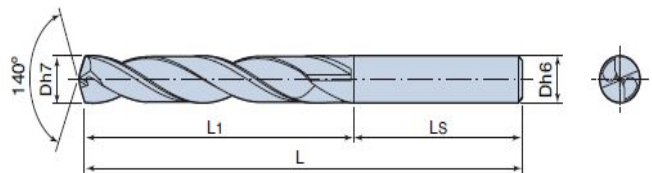

直径范围：Ø1.5~Ø25，每间隔0.1mm—规格，尺寸范围以外接受非标定做，价格比列与标准品一致。

订货型号	规格参数									
	刃部直径	柄部直径	3D		5D			8D		
			尺寸	冷却方式	尺寸	内	外	尺寸	内	外

3,5,8	∅D	∅d	L	L1	I	O	L	L1	I	O	L	L1	I	O
U512D-PMK-141~145-□□	14.1~14.5	15	140	73	●	●	185	116	●	●	230	160	●	○
U512D-PMK-146~150-□□	14.6~15.0			75	●	●		120	●	●		165	●	○
U512D-PMK-151~155-□□	15.1~15.5	16	146	78	●	●	194	124	●	●	242	171	●	○
U512D-PMK-156~160-□□	15.6~16.0			80	●	●		128	●	●		176	●	○
											254	182	●	○
												187	●	○
											266	193	●	○
												198	●	○
											278	204	●	○
												209	●	○
											290	215	●	○
												220	●	○
U512D-PMK-221~225-□□	22.1~22.5	23	188	113	●	●	257	180	●	●	无			
U512D-PMK-226~230-□□	22.6~23.0			115	●	●		184	●	●				
U512D-PMK-231~235-□□	23.1~23.5	24	194	118	●	●	266	188	●	●				
U512D-PMK-236~240-□□	23.6~24			120	●	●		192	●	●				
U512D-PMK-241~245-□□	24.1~24.5	25	200	123	●	●	275	196	●	●				
U512D-PMK-246~250-□□	24.6~25.0			125	●	●		200	●	●				

订货方法：例如订∅11.9、5D、内冷的，格式U512D-PMK-119-5I。

5

钻头


整体硬质合金-铸铁专用

碳钢	合金钢	工具钢	不锈钢	钛合金	耐热合金	铸铁	球墨铸铁	铝合金	铜合金
◎	◎	◎	◎	◎	◎				○

内冷型



外冷型

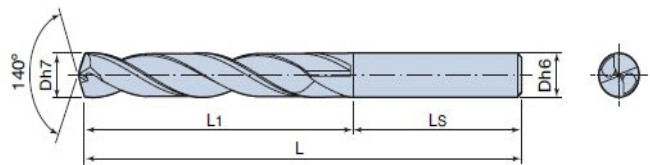

直径范围：∅1.5~∅25，每间隔0.1mm一规格，尺寸范围以外接受非标定做，价格比列与标准品一致。

订货型号	规格参数													
	刃部直径	柄部直径	3D				5D				8D			
			尺寸		冷却方式		尺寸		内	外	尺寸		内	外
3,5,8	ØD	Ød	L	L1	I	O	L	L1	I	O	L	L1	I	O
U513D-PMK-015~020-□□	1.5~2.0	3	63	10	●	●	70	14	●	●	76	19	●	○
U513D-PMK-021~025-□□	2.1~2.5		68	15	●	●	68	24	●	●	81	28	●	○
U513D-PMK-026~030-□□	2.6~3.0		18	●	●	28		●	●	33		●	○	
U513D-PMK-031~035-□□	3.1~3.5	4	72	20	●	●	86	32	●	●	92	39	●	○
U513D-PMK-036~040-□□	3.6~4.0		23	●	●	36		●	●	44		●	○	
U513D-PMK-041~045-□□	4.1~4.5	5	80	25	●	●	98	40	●	●	105	50	●	○
U513D-PMK-046~050-□□	4.6~5.0		28	●	●	44		●	●	55		●	○	
U513D-PMK-051~055-□□	5.1~5.5	6	82	28	●	●	100	45	●	●	118	61	●	○
U513D-PMK-056~060-□□	5.5~6.0		30	●	●	48		●	●	66		●	○	
U513D-PMK-061~065-□□	6.1~6.5	7	88	33	●	●	109	52	●	●	130	72	●	○
U513D-PMK-066~070-□□	6.6~7.0		35	●	●	56		●	●	77		●	○	
U513D-PMK-071~075-□□	7.1~7.5	8	94	38	●	●	118	60	●	●	142	83	●	○
U513D-PMK-076~080-□□	7.6~8.0		40	●	●	64		●	●	88		●	○	
U513D-PMK-081~085-□□	8.1~8.5	9	100	43	●	●	127	68	●	●	154	94	●	○
U513D-PMK-086~090-□□	8.6~9.0		45	●	●	72		●	●	99		●	○	
U513D-PMK-091~095-□□	9.1~9.5	10	106	48	●	●	136	76	●	●	166	105	●	○
U513D-PMK-095~100-□□	9.6~10.0		50	●	●	80		●	●	110		●	○	
U513D-PMK-101~105-□□	10.1~10.5	11	116	53	●	●	149	84	●	●	182	116	●	○
U513D-PMK-106~110-□□	10.6~11.0		55	●	●	88		●	●	121		●	○	
U513D-PMK-111~115-□□	11.1~11.5	12	122	58	●	●	158	92	●	●	194	127	●	○
U513D-PMK-116~120-□□	11.6~12.0		60	●	●	96		●	●	132		●	○	
U513D-PMK-121~125-□□	12.1~12.5	13	128	63	●	●	167	100	●	●	206	138	●	○
U513D-PMK-126~130-□□	12.6~13.0		65	●	●	104		●	●	143		●	○	
U513D-PMK-131~135-□□	13.1~13.5	14	134	68	●	●	176	108	●	●	218	149	●	○
U513D-PMK-136~140-□□	13.6~14.0		70	●	●	112		●	●	154		●	○	

订货方法：例如订Ø11.9、5D、内冷的，格式U513D-PMK-119-5I。


6

钻头

整体硬质合金-铸铁专用

碳钢	合金钢	工具钢	不锈钢	钛合金	耐热合金	铸铁	球墨铸铁	铝合金	铜合金
◎	◎	◎	◎	◎	◎				○

内冷型



外冷型



直径范围：Ø1.5~Ø25，每间隔0.1mm一规格，尺寸范围以外接受非标定做，价格比列与标准品一致。


订货型号	规格参数													
	刃部直径	柄部直径	3D				5D				8D			
			尺寸		冷却方式		尺寸		内	外	尺寸		内	外
3,5,8	ØD	Ød	L	L1	I	O	L	L1	I	O	L	L1	I	O
U513D-PMK-141~145-□□	14.1~14.5	15	140	73	●	●	185	116	●	●	230	160	●	○
U513D-PMK-146~150-□□	14.6~15.0			75	●	●		120	●	●		165	●	○
U513D-PMK-151~155-□□	15.1~15.5	16	146	78	●	●	194	124	●	●	242	171	●	○
U513D-PMK-156~160-□□	15.6~16.0			80	●	●		128	●	●		176	●	○
U513D-PMK-161~165-□□	16.1~16.5	17	152	83	●	●	203	132	●	●	254	182	●	○
U513D-PMK-166~170-□□	16.6~17.0			85	●	●		136	●	●		187	●	○
U513D-PMK-171~175-□□	17.1~17.5	18	158	88	●	●	214	140	●	●	266	193	●	○
U513D-PMK-176~180-□□	17.6~18.0			90	●	●		144	●	●		198	●	○
U513D-PMK-181~186-□□	18.1~18.5	19	164	93	●	●	221	148	●	●	278	204	●	○
U513D-PMK-186~190-□□	18.6~19.0			95	●	●		152	●	●		209	●	○
U513D-PMK-191~195-□□	19.1~19.5	20	170	98	●	●	230	156	●	●	290	215	●	○
U513D-PMK-196~200-□□	19.6~20.0			100	●	●		160	●	●		220	●	○
U513D-PMK-201~205-□□	20.1~20.5	21	176	103	●	●	239	164	●	●	无			
U513D-PMK-206~210-□□	20.6~21.0			105	●	●		168	●	●				
U513D-PMK-211~215-□□	21.1~21.5	22	182	108	●	●	248	172	●	●				
U513D-PMK-216~220-□□	21.6~22.0			110	●	●		176	●	●				
U513D-PMK-221~225-□□	22.1~22.5	23	188	113	●	●	257	180	●	●				
U513D-PMK-226~230-□□	22.6~23.0			115	●	●		184	●	●				
U513D-PMK-231~235-□□	23.1~23.5	24	194	118	●	●	266	188	●	●				
U513D-PMK-236~240-□□	23.6~24			120	●	●		192	●	●				
U513D-PMK-241~245-□□	24.1~24.5	25	200	123	●	●	275	196	●	●				
U513D-PMK-246~250-□□	24.6~25.0			125	●	●		200	●	●				

订货方法：例如订Ø11.9、5D、内冷的，格式U513D-PMK-119-5I。

请将发送至: sales@youqitools.com 或者传真: 021-60853087

公司: _____
 部门: _____
 电话: _____
 日期: _____

联系人: _____
 E-Mail: _____
 传真: _____

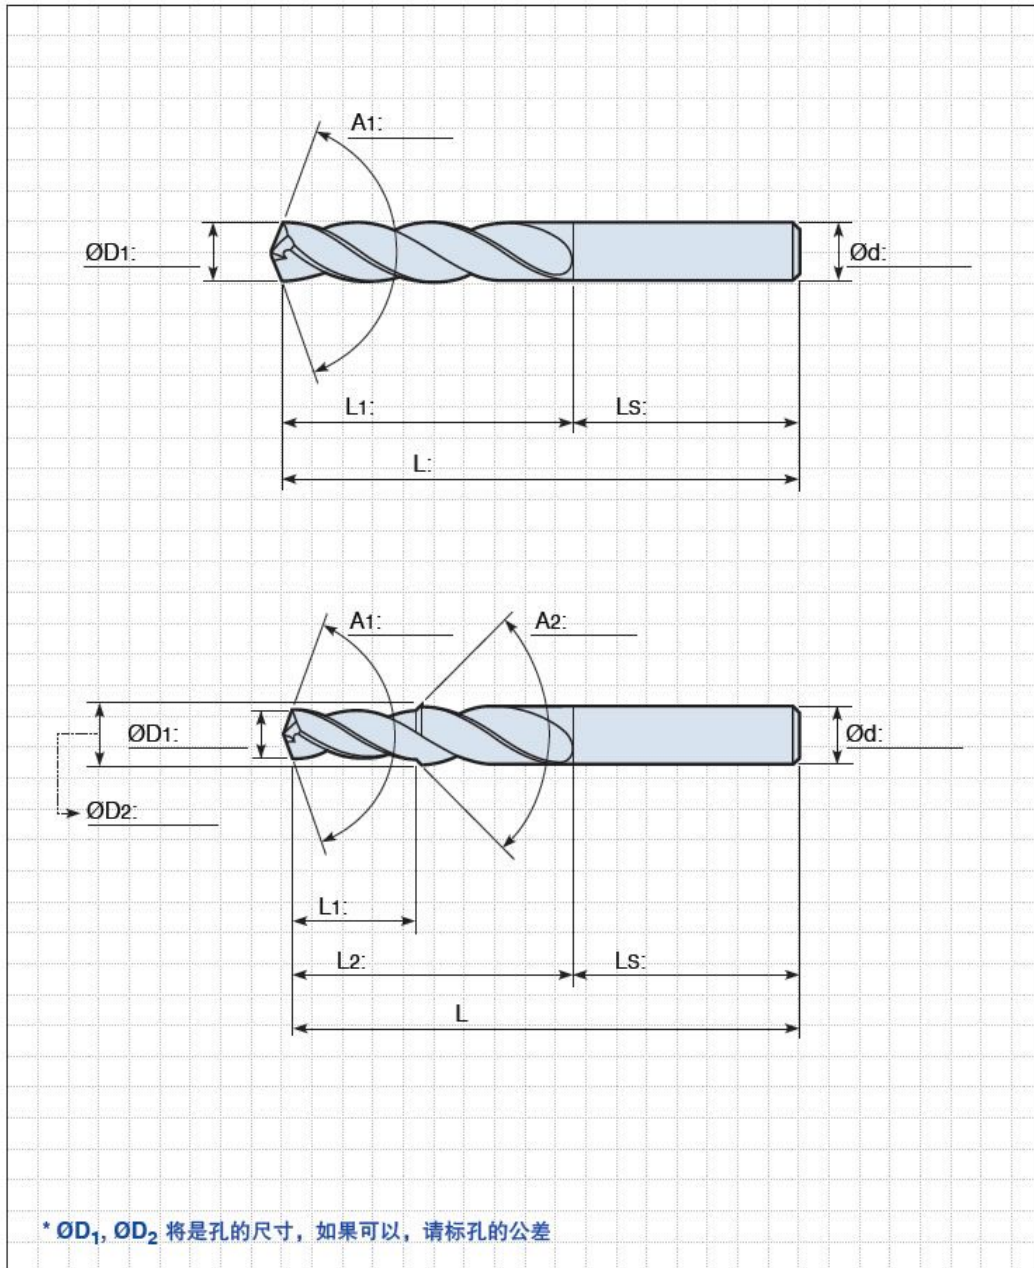

备注

柄部类型

- 圆柱柄
- 斜楔柄
- 带平面圆柱柄
- 削平柄

冷却方式

- 内冷
- 外冷

加工类型

- 卧式加工
- 立式加工

孔类型

- 盲孔
- 通孔

涂层

- TiN
- TiAlN

数量

• _____ pcs

工件信息

• 工件名: _____

• 材质: _____



U514D-PMK-015~020-□□
U514D-PMK-021~025-□□
U514D-PMK-026~030-□□
U514D-PMK-031~035-□□
U514D-PMK-036~040-□□
U514D-PMK-041~045-□□
U514D-PMK-046~050-□□
U514D-PMK-051~055-□□
U514D-PMK-056~060-□□
U514D-PMK-061~065-□□
U514D-PMK-066~070-□□
U514D-PMK-071~075-□□
U514D-PMK-076~080-□□
U514D-PMK-081~085-□□
U514D-PMK-086~090-□□
U514D-PMK-091~095-□□
U514D-PMK-095~100-□□
U514D-PMK-101~105-□□
U514D-PMK-106~110-□□
U514D-PMK-111~115-□□
U514D-PMK-116~120-□□
U514D-PMK-121~125-□□
U514D-PMK-126~130-□□
U514D-PMK-131~135-□□
U514D-PMK-136~140-□□

订货方法：例如订Ø11.9、5D、内冷的，格式U514D-PMK-119-5I。